

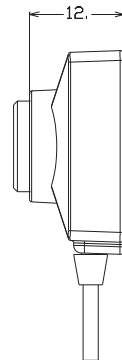
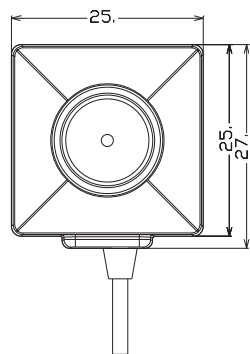
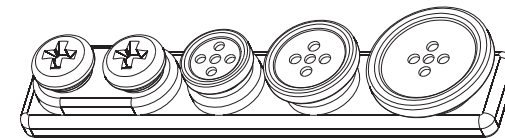


BU-18N/BU-18P Button Camera Operation Manual






Model	BU-18N/BU-18P	
Signal format	NTSC	PAL
Image sensor	Interline 1/3 inch SONY SUPER HAD CCD	
Scanning system	2:1 Interlace	
Scanning frequency	H: 15.734 KHz, V:59.94 Hz	H: 15.625 KHz, V:50 Hz
Total pixels	811(H) × 508(V)	795(H) × 596(V)
Effective pixels	768(H) × 494(V)	752(H) × 582(V)
Horizontal resolution	550 TV line	
Electronic shutter	1/60 – 1/100,000 sec auto	1/50 – 1/100,000 sec auto
S/N ratio	More than 45 dB (AGC off)	
Sensitivity	0.2 Lux / 30 IRE @ F2.0	
Gamma	$\gamma = 0.45$	
Sync System	Internal	
Video output	1 [Vp-p] Composite 75 Ω unbalanced	
Power supply	DC 5V \pm 10% / Max 220mA	
Operating temperature	-10 $^{\circ}$ C ~ +50 $^{\circ}$ C	
Storage temperature	-20 $^{\circ}$ C ~ +60 $^{\circ}$ C	
Dimension	25mm x 25mm	



BU-18NCK/BU-18PCK Name and Function of Parts

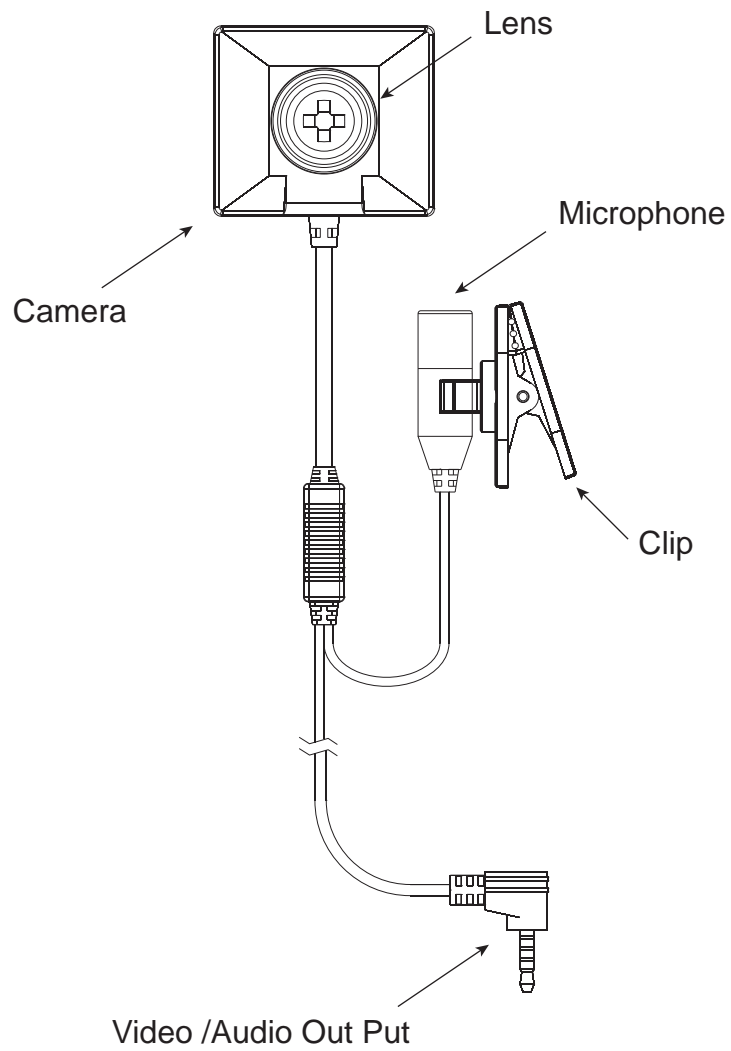

(1)

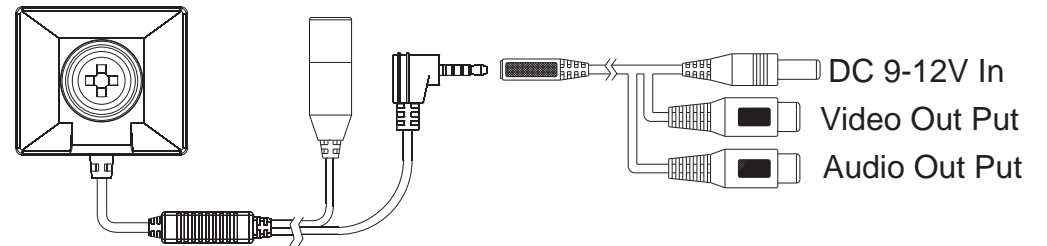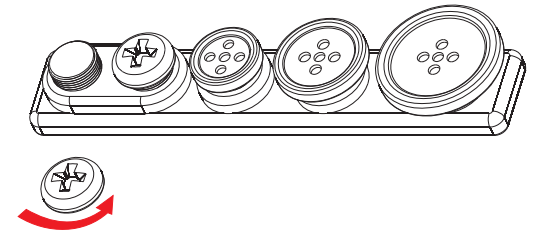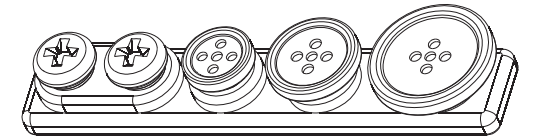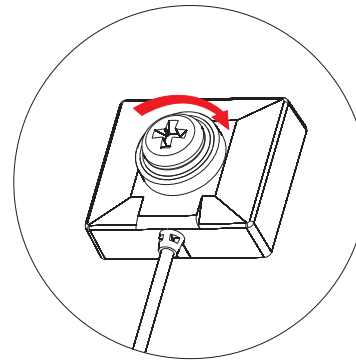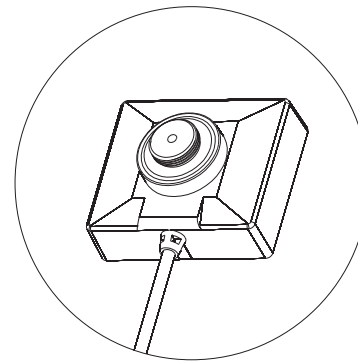

(2)